





Product Specification (1/2)

2019.April

RESU10H type-R

Electrical Characteristics				
Total Energy Capacity 1)		9.8 kWh @25°C (77°F), Beginning of Life		
Usable Energy Capacity 1)		9.3 kWh @25°C (77°F)		
Battery Capacity		63 Ah		
Voltage Range	Charge	400 to 450 V $_{DC}$		
	Discharge	350 to 430 V $_{DC}$		
Absolute Max. Voltage		520 V _{DC}		
Max. Charge/Discharge Current		11.9A@420V / 14.3A@350V		
Max. Charge/Discharge Power 2)		5kW		
Peak Power (only discharging) 3)		7kW for 10 sec.		
Peak Current (only discharging)		18.9A@370V for 10 sec.		
Communication Interface		RS485		
DC Disconnect		Circuit Breaker, 25A, 600V rating		
Connection Method		Spring Type Connector		
User interface		LEDs for Normal and Fault operation		

Operating Conditions

Indoor / Outdoor (Wall-Mounted)
14 to 113°F (-10 to 45°C)
59 to 86°F (15 to 30°C)
-22 to 131°F (-30 to 55°C)
5% to 95%
Max. 6,562ft (2,000m)
Natural Convection
< 40 dBA
1

Certification

Safety	Cell	UL1642
	Battery Pack	UL1973 / CE / RCM / TUV (IEC 62619)
Emissions		FCC
Hazardous Materials Classification		Class 9
Transportation		UN38.3 (UNDOT)
Ingress Rating		IP55

- * Test Conditions Temperature 25°C, at the beginning of life
- * Total Energy is measured under specific condition from LGC(0.3CCCV/0.3CC)

- 2) LG Chem recommends 3.3kW for maximum battery lifetime
- 3) Peak Current excludes repeated short duration (less than 10 sec. of current pattern).

¹⁾ Value for Battery Cell Only (Depth of Discharge 95%). Actual usable energy at the AC output may vary by condition, such as the battery converter, inverter efficiency and temperature.




Product Specification (2/2)


2019.April

RESU10H type-R

Features

- ☐ Emergency Power Back-up
- ☐ Compact size and space saving
- ☐ Wide range of inverters available for matching
- ☐ Wall mounting installation
- ☐ Proven Safety and 10 year warranty

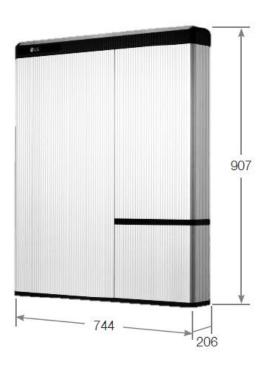

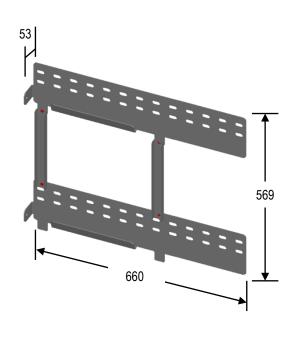

Mechanical Characteristics

	Width	744 mm (29.3")
Dimensions	Height	907 mm (35.7")
	Depth	206 mm (8.1")
Weight		97 kg (214lbs)



